
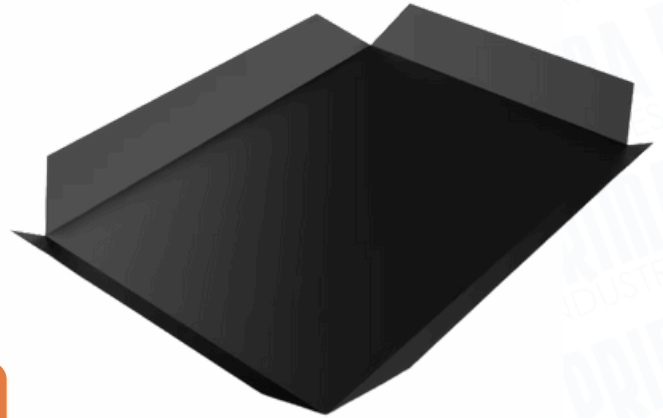



**PRIMA**  
INDUSTRIES

# PLASTIC SLIP SHEETS

BY PRIMA INDUSTRIES

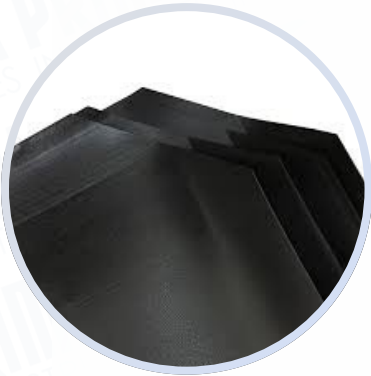

## ▶ KEY ATTRIBUTES

RECYCLED MATERIAL AND ARE RECYCLABLE

HIGH COF MINIMIZES PRODUCT SLIPPAGE

CAN BE DOUBLE STACKED

## ▶ SPECIFICATIONS

TENSILE STRENGTH

16 PMA MIN.

DENSITY

0.95 PLUS MINUS 5%

ELONGATION AT BREAK


250% MIN.

TOP SURFACE (ROUGH)

0.5+

BOTTOM SURFACE (SMOOTH)


0.2-0.3



## ▶ **LOAD CAPACITY**

LOAD CAPACITY (TONNE)	THICKNESS (MM)
1.0	0.7
1.2	0.9
1.5	1.1
1.9	1.5
2.0	1.6
3.0	2.2
3.4	2.5
4.1	3.0


**NOTE:** OTHER CAPACITIES CAN BE MADE-TO-ORDER

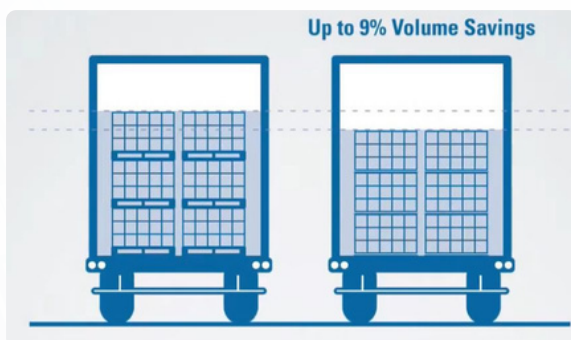


9% of Cargo Space Plus You Can Load More  
Weight as Pallet Weight Is Eliminated



Weight  
Savings





## COMPARISON TABLE

FEATURE	CARDBOARD	PLASTIC SLIP SHEETS
DURABILITY	LOWER	HIGHER
MOISTURE RESISTANCE	LOWER	HIGHER
WEIGHT	LIGHTER	HEAVIER
REUSABILITY	LIMITED	HIGHER

## PLASTIC SLIP SHEET VS CARDBOARD SHEET

DURABLE, LIGHTWEIGHT, SPACE-SAVING

HIGH TS REDUCES TEARS AND TAB FAILURES

REUSABLE IN CERTAIN APPLICATIONS

PREFERRED METHOD IN MANY INDUSTRIES

HIGH COF MINIMIZES PRODUCT SLIPPAGE

CARDBOARD SHEET CAN TEAR WHEN MOIST

## FOR MORE INFO

**MOBILE**



+92 333 8011116

**EMAIL**



info@primasheets.com

**WEBSITE**



primasheets.com